

WARNING!

You must read and understand all of the following instructions before first use. If you do not, it could result in serious injury up to and including death. Any questions please call 309-691-9653.

WARNING!

- **Make sure** you have **read** and **understand** all instructions.
- **Practice** first at ground level.
- **Always** wear TMA approved fall arrest system when using any treestand.
- **Do not use** while intoxicated or when taking medications that cause drowsiness.
- **Do not attach** to rotten, loose bark or dead trees, metal or utility poles.
- **Avoid** use during wet or icy conditions, or during lightning storms.
- Haul gun or bow up from ground **after** climbing tree.
- Platform is designed to hold **one person only**.
- **Do not** jump on platform or seat, nor should you stand on seat.
- **Do not** attempt to alter product in any way.
- **Maximum** load is 350 pounds, except where noted.
- **Failure to follow these instructions could cause serious injury or death.**

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)



PRODUCT LINE INSTRUCTIONS MANUAL

LONE WOLF PORTABLE TREESTANDS

PO Box 62

Edwards, IL 61528

Phone: (309) 691-9653 • Fax: (309) 693-9410

www.lonewolfstands.com

WARNING!

You must read and understand all of the following instructions before first use. If you do not, it could result in serious injury up to and including death. Any questions please call 309-691-9653.

WARNING!

- **Make sure** you have **read** and **understand** all instructions.
- **Practice** first at ground level.
- **Always** wear TMA approved fall arrest system when using any treestand.
- **Do not use** while intoxicated or when taking medications that cause drowsiness.
- **Do not attach** to rotten, loose bark or dead trees, metal or utility poles.
- **Avoid** use during wet or icy conditions, or during lightning storms.
- Haul gun or bow up from ground **after** climbing tree.
- Platform is designed to hold **one person only**.
- **Do not** jump on platform or seat, nor should you stand on seat.
- **Do not** attempt to alter product in any way.
- **Maximum** load is 350 pounds, except where noted.
- **Failure to follow these instructions could cause serious injury or death.**

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

General Maintenance

- Make sure all nuts and bolts are secure before each use.
- Replace any worn or damaged parts with components from Lone Wolf.
- All bolts for this product are Grade 8.

POLYURETHANE TRACTION BELT

APPLICABLE TO: Alpha™ Sit & Climb and Alpha™ Hand Climber

- 1.) With a permanent marker write date of 1st use on each belt.
- 2.) Inspect belt before each use
- 3.) Replace every 5 years or when you observe any of the following:
 - a.) belt has external cracks or tears visible
 - b.) any internal cables are broken
 - c.) any teeth are offset from normal pitch or are torn or cut



CORRECT

(dia. 1)



INCORRECT

(dia. 2)



CORRECT

(dia. 1a)



INCORRECT

(dia. 2a)

Shown is the proper use of the traction belt for the Lone Wolf Climbers (dia 1). The polyurethane belts are designed to be used on the Lone Wolf products only. Always use your traction in the position that it is shown in dia 1. Never use the belt in this position (dia. 2). Use in this position can cause damage to the traction belt. **WARNING:** Point of arrow marks the end of the belt (dia. 2a). No part of the arrow should be showing after the cams are engaged (dia. 1a). Any failure to follow the instructions may cause belt to disengage and cam to open.

POLYESTER WEB BELTS

APPLICABLE TO: Alpha™ Ladder Stand, Climbing Sticks, Elite™ Hang on, Alpha™ Hang On, Assault™ Hang On, and Assassin™ Platform, Pro Series Hang On & Climbing Sticks

- 1.) Inspect belts before each use
- 2.) Replace every 5 years or every year if left out yearly
- 3.) Replace belts if you observe any of the following:
 - a.) cut or worn webbing
 - b.) buckles are bent or cam release is binding
 - c.) stitching is loose, cut, or becoming unraveled
- 4.) With a permanent marker write the date of the 1st use on each belt

Lone Wolf Alpha™ Ladder Stand

WARNING!

- **Make sure** you have **read** and **understand** all instructions.
- **Practice** first at ground level.
- **Always** wear TMA approved fall arrest system when using any treestand.
- **Do not use** while intoxicated or when taking medications that cause drowsiness.
- **Do not attach** to rotten, loose bark or dead trees, metal or utility poles.
- **Avoid** use during wet or icy conditions, or during lightning storms.
- Haul gun or bow up from ground **after** climbing tree.
- Platform is designed to hold **one person only**.
- **Do not** jump on platform or seat, nor should you stand on seat.
- **Do not** attempt to alter product in any way.
- **Maximum** load is 350 pounds, except where noted.
- **Failure to follow these instructions could cause serious injury or death.**

GENERAL MAINTENANCE

- Make sure all nuts and bolts are secure before each use.
- Replace any worn or damaged parts with components from Lone Wolf.
- All bolts for this product are Grade 8.

POLYESTER WEB BELT


- Replace every 5 years or every 2 years if left out yearly.
- Inspect belts before each use.
- Replace belts when you observe any of the following:
 - a.) Cut or worn webbing.
 - b.) Buckles are bent or cam release is binding.
 - c.) Stitching is loose, cut or becoming unraveled.
 - d.) With permanent markers write date of first use on each belt.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued

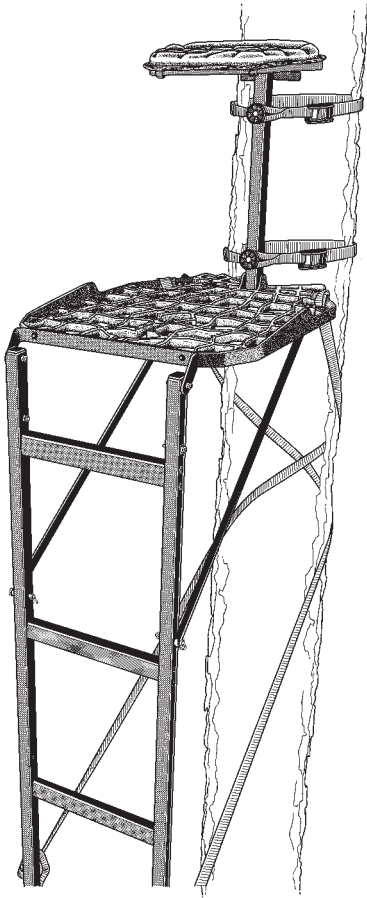

LONE WOLF LADDER STAND (ALS16)



Step 1: Attach the offset bracket to the seat post as shown. The offset bracket should be on the opposite side of the versa button.



Step 2: Tighten the offset bracket so it is secure against the seat post.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 3: Take your 6 ft. strap and secure one loop off to the clevis pin. Do this while holding the foot leveler in place.



Step 4: Take the strap around the tree attaching the other loop to the opposite clevis pin and foot leveler.



Step 5: Take the slack out of the strap to secure the base of the ladder for pulling apart the ladder sections.




Step 6: Firmly grab the platform and pull the ladder sections apart to your desired height.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued

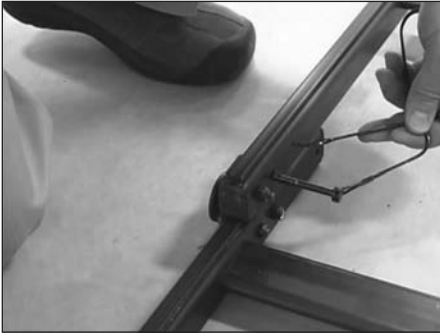


Step 7: Lock the extended ladder section in place by inserting 2 clevis pins per section in the appropriate marked holes. Run the clevis pins from the inside of the ladder rail to the outside. Lock the clevis pins in place.



Step 8: After the ladder sections have been pulled apart and secured in place with the clevis pins, remove the strap from the feet levelers and secure the clevis pins back in place.



Step 9: Next, you will install the platform support bars. Lift the rear of the platform up to a level position.

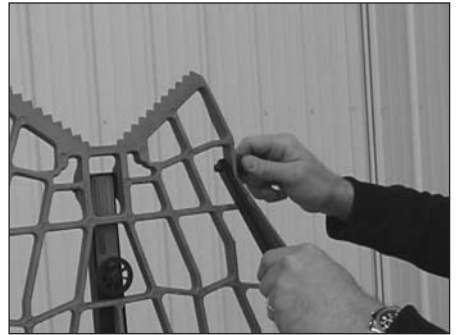

Step 10: Platform support bars should be positioned along the inside of the platform and ladder rails. Secure them with the tightening knob.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 11: Again, the ladder support bars should be from the inside of the rail placing the clevis pin inside out and locking the pin in place.



Step 12: Repeat the process with the opposite platform support bar.



Step 13: Again, place the support bar on the inside of the ladder rail in the appropriately marked hole. Insert the clevis pin from the inside out locking the pin in place.



Step 14: Next, feed the looped end of the 16 ft. stabilizer strap through the platform as shown. Take the other looped end, along with the buckle, through the loop. Pull and secure to the platform.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND


If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 15: Then, repeat this process on the opposite side of the platform. Pull and secure the loop to the platform.

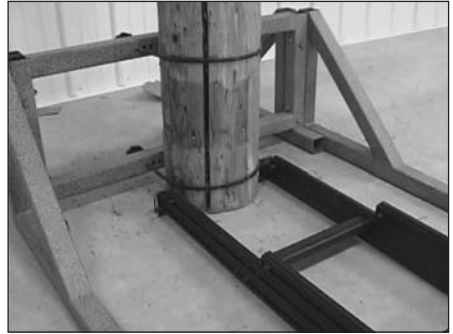

Step 16: With the base of the ladder or the bottom rung against the base of the tree.



Step 17: Lift the ladder platform to chest height.



Step 18: Press upward over head.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 19: Walk the ladder up toward the tree reaching hand over hand against the rungs until the platform connects with the tree.



Step 20: Walk the bottom of the ladder out away from the tree until the ladder is in a free standing position.



Step 21: Installation of the 6 ft stabilizer straps. Criss-cross the stabilizer straps around the back of the tree making sure the straps cross at the highest point possible. Secure them off to the versa buttons on the ladder sections. Tighten them down taking the tension out of the straps.



Step 22: When installed properly, they should be crossed in the back of the tree as shown.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 23: Install the black ladder support strap by attaching it to one versa button on one side of the ladder rail, around the tree, securing it off to the opposite versa button on the opposite side, pulling, and securing the ladder to the tree. Please **NOTE:** the black 11 ft ladder support strap should be used on the highest versa button that can be reached from the ground or from the first ladder rung.



Step 24: Install the ladder wedge bar. The clamp end of the ladder wedge bar should be placed over the first or second rung and secured with the clevis pin from the underside of the rung.



Step 25: Remove the clevis pin from the adjustment slide in the wedge bar.



Step 26: Slide the bar to a length that causes the v-bracket to be in a slightly higher position than the clamp end. Then, reinsert the clevis pin to lock the wedge bar at that length.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

Lone Wolf Alpha™ Ladder Stand

continued



Step 27: Slowly and slightly pull up and out away from the tree on the bottom rung.



Step 28: Before installing your last 2 stabilizer straps and before climbing onto the platform, you must install your tree attachment rope and then your tether to your carabineer.



Step 29: Now you're ready to install your last two stabilizing straps. Wrap the belt around the tree and place the loop over the top versa button. Pull the belt tightly.



Step 30: Lastly, install second stabilizer strap at this time.

ALWAYS WEAR A TMA APPROVED FALL ARREST SYSTEM WHEN USING ANY TREESTAND

If you do not understand any of these instructions, please call Customer Service (309-691-9653) or visit our web site (www.lonewolfstands.com)

SEE THE LATEST FROM LONE WOLF
AT WWW.LONEWOLFSTANDS.COM



THE WOLF PACK™



LONE WOLF QUIVER AND
QUIVER STAND MOUNT



WOLF JAWS™ "COMBO"



SILENT TOTE™

**For written and video instructions
please visit www.lonewolfstands.com**